

Revelation EP Series Specifications

(For specific EP24, EP26, EP33, EP34, EP36, and EP44 Series details, see page 2)

Revelation EP Series are designed to fit in standard 15/16" or 24mm grid systems or similar hard ceiling finished openings and can be joined together in a variety of configurations.

Drop Ceiling Applications:
EcoPlus light box with attached Luminous SkyTile sits on, and is clipped to, Revelation Elevator

Hard Ceiling Applications:
EcoPlus light box with attached Luminous SkyTile sits on Revelation Elevator

For drop ceiling and hard ceiling application details, see page 2.

1 Lighting (EcoPlus LED back lit light box):

Color temperature: 6500K
Strict LED binning standards assure consistent & high quality illumination
State of the art back lit technologies provide uniform illumination for the Luminous SkyTile graphic
Housed in a white powder-coated, extruded (non-ferrous) aluminum frame
Moisture and chemical resistant
Each unit has a four knock-out junction box
Compatible with MRI and other RF-free environments

2 Luminous SkyTile (lens):

Acrylic, Acrylite, or polycarbonate substrate
Durable and easy to clean non-glare matte finish
High resolution reproduction from proprietary digital image file
Color-calibrated for daylight quality light source
Fade resistant pigmented inks containing UV inhibitors

3 Revelation Elevator (frame):

Durable, moisture resistant and easy to clean
Quick and easy installation
Light weight powder-coated aluminum, white matte finish to match standard grid
2.75" (7cm) vertical profile
Compatible with standard 15/16" or 24mm grid systems or hard ceilings
Precision machined corners, seamless architectural appearance

UL, CSA, and CE compliant:

EP24, EP26, EP33, EP34, EP36, and EP44 Series when used with 24PS HLG Power System, UL/CSA Listed or CE Compliant power supply fully certified by Intertek Group plc

Electrical:

24V DC
For amperages and watts of specific fixtures, see page 2
Sky Factory 24PS HLG Power System
Converts 90-305V AC to 24V DC
Size and quantity per installation calculated by Sky Factory Power system aluminum enclosure
Mounted on baseplate with junction box on input and output ends
See 24PS HLG Power System Technical Specifications sheet
Sky Factory provided HLG dimmable power supply (International Only)
Converts 90-305V, 47-63 Hz to 24V DC
Client provided UL/CSA Listed or CE Compliant power supply
Must convert V AC to 24V DC

Items not provided:


AC wiring between fuse/breaker panel and 24V DC power system
DC wiring between 24V DC power system and EcoPlus light box
Dimmer wiring between 24V DC power system and switch/dimmer control box
RFI/EMI filters for MRI installations
See Revelation w/ EcoPlus Installation Instructions; and, Revelation w/ EcoPlus Electrical Packet (24PS HLG), Electrical Instructions (HLG) or Electrical Instructions (Fixture Only)

Ceiling Clearance:

Fixture height from ceiling grid 8.5" (21.6cm)
Recommended minimum space above ceiling grid 10.88" (27.6cm)
Recommended minimum space above soffit 12.5" (31.8cm)
Ceiling height of no less than 9' (2.74m) recommended
For help with ceiling constraints, please contact the Sky Factory

Revelation EP Series


Recessed Ceiling Mount
Back Illuminated Sky Image Ceiling

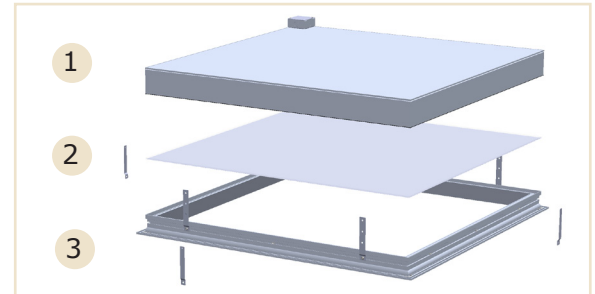

Key Attributes:

15/16" (24mm) ceiling grid or hard ceiling applications
6500 Kelvin – cool daylight
Non-ferrous, RF-free construction
MRI compatible

Cross Section Details

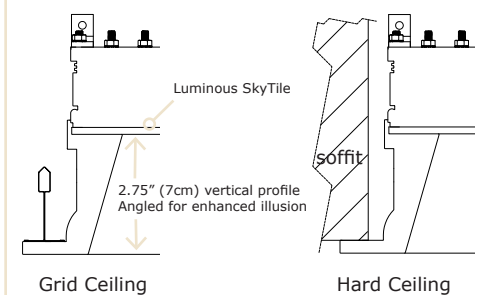

Weight:

For installed weight of fully assembled Revelation EP Series fixture, see page 2.

Configurations:

Revelation EP Series fixtures can be grouped together in a wide variety of configurations.

Installation:

Elevators and light box easily installed into standard 15/16" or 24mm grid systems and can be recessed into a variety of hard ceilings.

US Patent Information:

Our products, systems, and methods may be protected by one or more of the following US Patents: Pat. 9,164,011, Pat. 8,851,700, Pat. 7,959,316, and Pat. 7,481,550, as well as other patents pending.

Luminous SkyCeilings Revelation EcoPlus LED



CONFORMS TO:
ANSI/UL STD 2108
CERTIFIED TO:
CAN/CSA STD C22.2 No. 250.0



Model	Amps [A]	Power [W]	Weight	Drop Ceiling Application
EP24-RVN Series	1.86	44.64		
EP24			27.2 lbs	Fits in standard 2' on center, 15/16" grid system
EP24m			12 kg	Fits in standard 60cm on center, 25mm grid system
EP24g			12.9 kg	Fits in standard 62.5cm on center, 25mm grid system
EP26-RVN Series	2.79	66.96		
EP26			44.8 lbs	Fits in standard 2' on center, 15/16" grid system
EP26m			19.8 kg	Fits in standard 60cm on center, 25mm grid system
EP26g			21.1 kg	Fits in standard 62.5cm on center, 25mm grid system
EP33-RVN Series	2.09	50.16		
EP33			33.7 lbs	Fits in standard 2' or 3' on center, 15/16" grid system
EPm			15 kg	Fits in standard 60cm or 90cm on center, 25mm grid system
EPg			15.9 kg	Fits in standard 62.5cm or 93.75cm on center, 25mm grid system
EP34-RVN Series	2.79	66.96		
EP34			42.5 lbs	Fits in standard 2' on center, 15/16" grid system
EPm			19.3 kg	Fits in standard 60cm on center, 25mm grid system
EPg			20 kg	Fits in standard 62.5cm on center, 25mm grid system
EP36-RVN Series	4.19	100.56		
EP36			60 lbs	Fits in standard 2' or 3' on center, 15/16" grid system
EPm			26.5 kg	Fits in standard 60cm or 90cm on center, 25mm grid system
EPg			28.3 kg	Fits in standard 62.5cm or 93.75cm on center, 25mm grid system
EP44-RVN Series	3.72	89.28		
EP44			53.4 lbs	Fits in standard 2' on center, 15/16" grid system
EPm			23.6 kg	Fits in standard 60cm on center, 25mm grid system
EPg			25.2 kg	Fits in standard 62.5cm on center, 25mm grid system
				Hard Ceiling Application
				EPXX-RVN Series fixtures fit in a variety of hard ceiling applications
				Contact Sky Factory for specific finished opening dimensions